






DC PULSE TIG / MMA WELDING MACHINE



SPARKLINE
WELDERS

ISO 9001 : 2015 Company

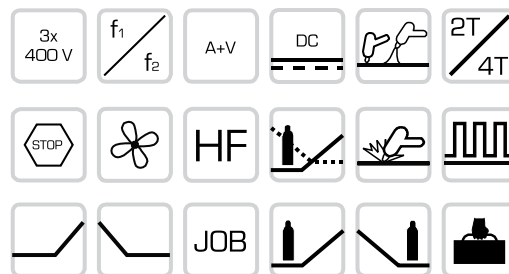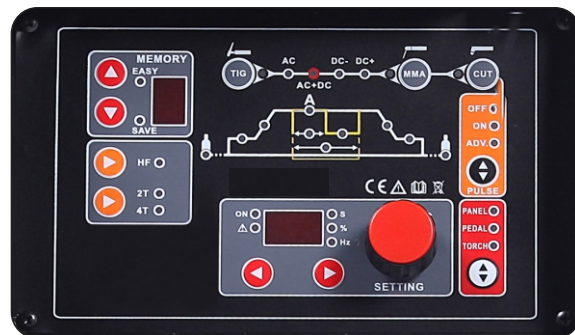

Optional Accessories



- Tig torch 4m
- Earth clamp cable 500A earth clamp
- Welding cable with 500A electrode holder
- Gas hose 2m

| Model | Power Supply Voltage | Rate Input Capacity (KVA) | Rate Input Current (A) | No Load Voltage | Output Current Range | Duty Cycle | Weight L*W*H*(mm) |
|---------------------|----------------------|---------------------------|------------------------|-----------------|--------------------------|------------|-------------------|
| DIGI-TIG PLUS 400DP | 3*4000V, 50/60Hz | 16.8 | 24.3 | 80 | TIG:10-400A, MMA:10-315A | 60% | 40 kg 530*290*610 |
| DIGI-TIG PLUS 500DP | 3*4000V, 50/60Hz | 25 | 36 | 80 | TIG:10-400A, MMA:10-315A | 60% | 48 kg 530*290*610 |
| DIGI-TIG PULS330 | 3*400V, 50/60Hz | 12 | 19 | 70 | TIG:5-330A, MMA:10-270A | 60% | 28 kg 560*240*460 |

In view of continuous Development, we reserve the rights to modify the design, specifications and or dimensions without notice.